

Stormwater Brick® 4" x 8"

Permeable Interlocking Concrete Pavingstones

Cumberland Blend

 **Genest** 1-800-649-4773
www.GenestConcrete.com


Stormwater Brick®

4" x 8"

The Stormwater Brick used as part of a permeable pavement system is an excellent way to control runoff water. The aggregate base used in the system helps to filter and reduce pollutants. The ground water is recharged because the water is not running off the pavement. Not only does it collect and properly handle storm water, but provides a functional and attractive paving solution.

Packaging

- 78.24 sq. ft. per pallet
- 4.5 pieces per sq. ft.



4" x 8" x 3 1/8"
100 mm x 200 mm x 80 mm



4" x 4" x 3 1/8"
100 mm x 100 mm x 80 mm



Stormwater Brick® 4" x 8"
Cumberland Blend (shown wet)

Standard Colors




Granite Blend



Cumberland Blend

ICPI* Sample System Design

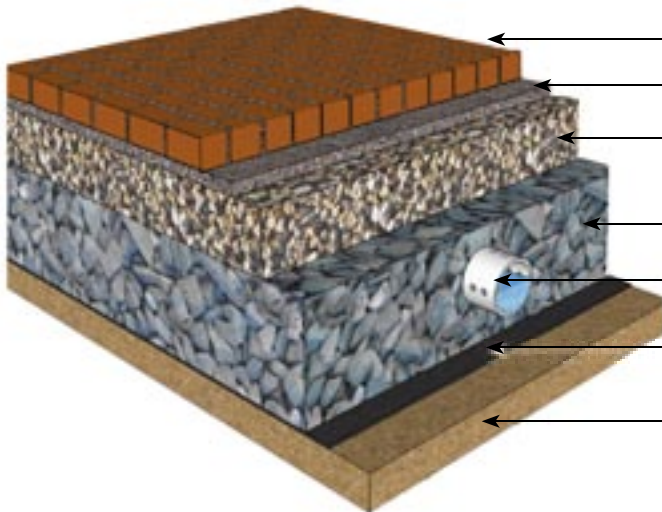

- Stormwater Brick®
- Bedding and Joint Material - *Typically #8 Stone*
- Open-Graded Base - *Typically #57 Stone*
- Open-Graded Sub-Base - *Typically #2 Stone*
- Under drain
- Optional Geotextile
- Uncompacted Soil

General specifications meet or exceed ASTM C-936
 Compressive strength: 8,000 PSI minimum
 Maximum water absorption: 5%
 Equals or exceeds freeze-thaw resistance

Design and Specification Aids: Stormwater Brick
 Installation and guide specifications are available at
www.genestconcrete.com. Or you can speak
 directly with our sales department at **800-649-4773**

 **Genest**
1-800-649-4773
www.GenestArchitecture.com

*Interlocking Concrete Pavement Institute - www.icpi.org